


Pliable aluminium conduit for PV systems



Flexibility for connections in PV systems

Whether you need to connect PV modules, design flexible transitions between modules or integrate into distribution boards on switchgear – ALUX adapts to every challenge and makes installation more efficient than ever.

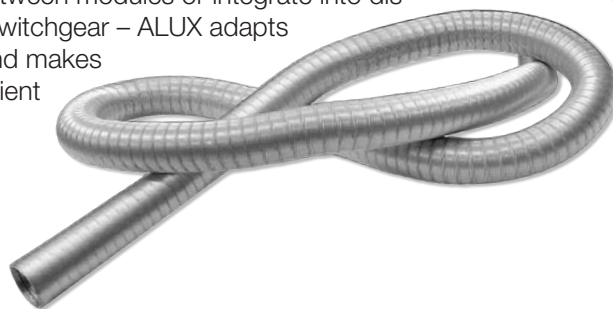

- All connections for PV systems
- Transitions between panels and distribution boards on switchgear
 - Transitions where 90° is not possible
 - For closed systems

pliable aluminium conduit without thread, length: 1.5 m, light compression resistance, light impact resistance, for surface and outdoor installation and installation on wood

Art	ref	dn	di	ps
ALUX 25 1.500 mm	108 807	25 mm	21,5 mm	10
ALUX 32 1.500 mm	108 808	32 mm	28,2 mm	10
ALUX 40 1.500 mm	108 809	40 mm	36,5 mm	10

Material Al

EN 61386-22

non flame propagating

GLASS 22552

320 N

-45 to +150 °C

1J

CE UK CA ÖVE

easy to cut with USZ-S



ref
015 008

versatile cutting tool for plastic conduits up to Ø 32 mm, plastic trunkings up to 25x40 mm and ALUX

