


Starline & Bench Trunkings

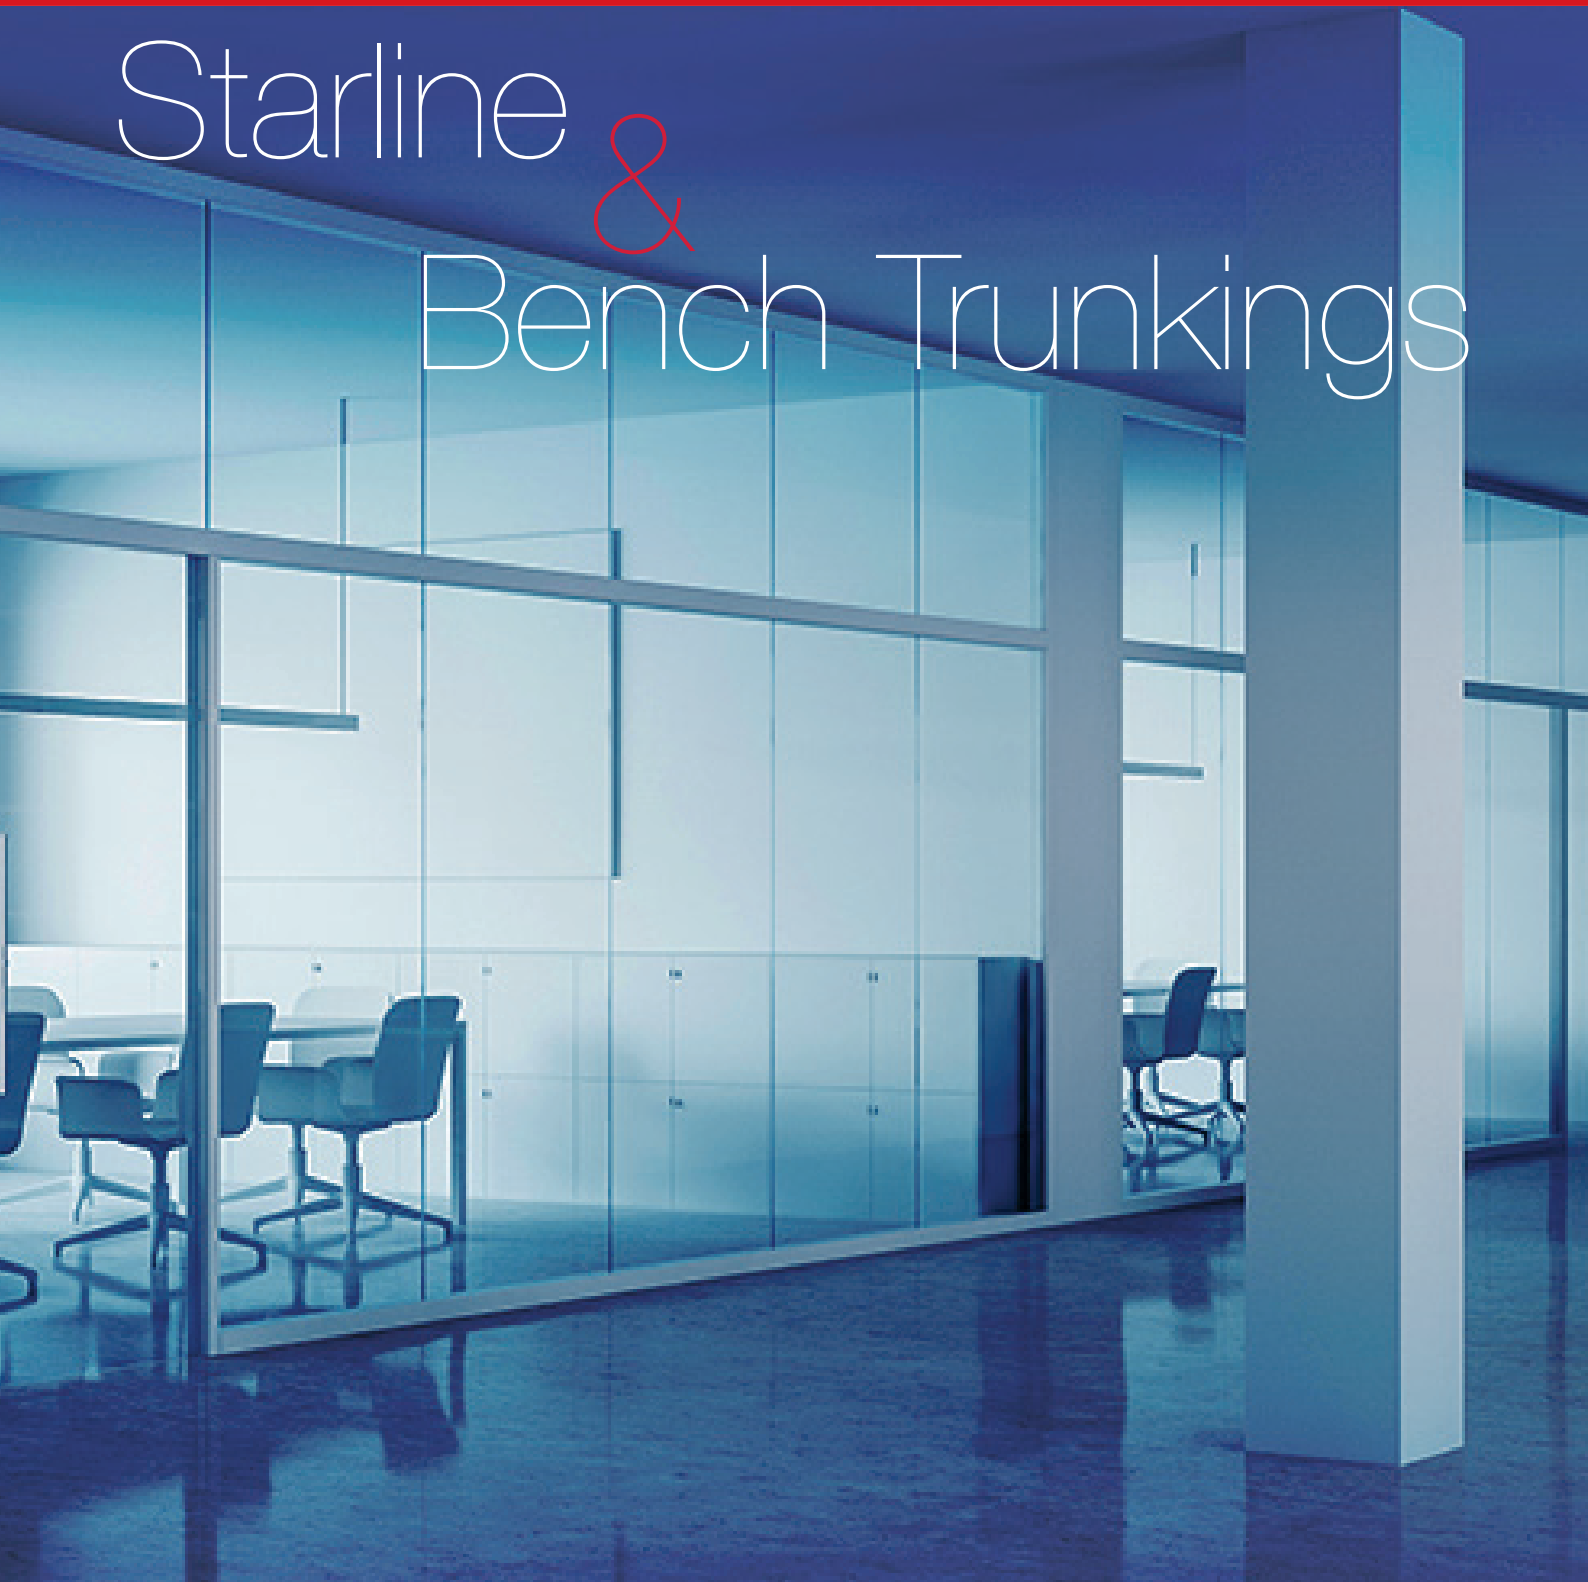

SLR, Dado trunking curved profile, white (RAL 9010)

Material			
PVC-U	flame retardant	-25 °C/+60 °C	2J

Standard: EN 50085, BS 4678/4



Item code	Width x Depth	PU	PU	Art. No.
SLR 50/170 3M	170 x 50 mm	3 m	150 m	101124

SLRIA, Internal adjustable angle - Cat6/6A/7/8, white (RAL 9010)

Material			
PVC-U	flame retardant	-25 °C/+60 °C	2J

Standard: EN 50085, BS 4678/4



Item code	Width x Depth	PU	PU	Art. No.
SLRIA 50/170	170 x 50 mm	40 pc	1680 pc	108799

SLREA, External adjustable angle - Cat6/6A/7/8, white (RAL 9010)

Material			
PVC-U	flame retardant	-25 °C/+60 °C	2J

Standard: EN 50085, BS 4678/4




Item code	Width x Depth	PU	PU	Art. No.
SLREA 50/170	170 x 50 mm	50 pc	2100 pc	108800

SLRFA, Flat angle - Cat6/6A/7/8, white (RAL 9010)

Material			
PVC-U	flame retardant	-25 °C/+60 °C	2J

Standard: EN 50085, BS 4678/4

Item code	Width x Depth	PU	PU	Art. No.
SLRFA 50/170	170 x 50 mm	22 pc	924 pc	108801




SLRFT, Flat tee - Cat6/6A/7/8, white (RAL 9010)

Material			
PVC-U	flame retardant	-25 °C/+60 °C	2J

Standard: EN 50085, BS 4678/4

Item code	Width x Depth	PU	PU	Art. No.
SLRFT 170/50	170 x 50 mm	16 pc	672 pc	108802



SLRTOA, Take off adaptor conduits 16 and 20 and mini trunking 16x16 and 16x25, white (RAL 9010)

Material			
PVC-U	flame retardant	-25 °C/+60 °C	2J

Standard: EN 50085, BS 4678/4

Item code	Dimensions L x W x H	PU	PU	Art. No.
SLRTOA 50/170 WH	75 x 70 x 62 mm	25 pc	450 pc	108803



RK 50/170 WH, Cover joint, white (RAL 9010)

Material			
PVC-U	flame retardant	-25 °C/+60 °C	2J

Standard: EN 50085, BS 4678/4

Item code	For wall duct width	PU	PU	Art. No.
RK 50/170 WH	170 mm	10 pc	200 pc	101590



RE 50/170, Stop end for round corner dado trunking, white (RAL 9010)

Material			
PVC-U	flame retardant	-25 °C/+60 °C	2J

Standard: EN 50085, BS 4678/4

Item code	Width x Depth	PU	PU	Art. No.
RE 50/170 WH	170 x 50 mm	10 pc	150 pc	101120



SLSR, Skirting trunking, white (RAL 9010)

Material

PVC-U



flame retardant



-25 °C/+60 °C



2J

Standard: EN 50085, BS 4678/4



Item code	Width x Depth	PU	PU	Art. No.
SLSR 50/170 WH 3M	170 x 50 mm	3 m	150 m	108522

SRAE 50 WH, External angle, white (RAL 9010)

Material

PVC-U



flame retardant



-25 °C/+60 °C



2J

Standard: EN 50085, BS 4678/4



Item code	Width x Depth	PU	PU	Art. No.
SRAE 50/170 WH	170 x 50 mm	1 pc	20 pc	108523

SRIE WH, Internal angle, white, white (RAL 9010)

Material

PVC-U



flame retardant



-25 °C/+60 °C



2J

Standard: EN 50085, BS 4678/4



Item code	Width x Depth	PU	PU	Art. No.
SRIE 50/170 WH	170 x 50 mm	1 pc	20 pc	108524

SRER/L 50 WH, Stop end left or right, white (RAL 9010)

Material			
PVC-U	flame retardant	-25 °C/+60 °C	2J

Standard: EN 50085, BS 4678/4

Item code	Suitable for	Width x Depth	PU	PU	Art. No.
SREL 50/170 WH	Left	170 x 50 mm	10 pc	150 pc	108530
SRER 50/170 WH	Right	170 x 50 mm	10 pc	150 pc	108531



SRFTD 50/170 WH, Flat tee downward, white (RAL 9010)

Material			
PVC-U	flame retardant	-25 °C/+60 °C	2J

Standard: EN 50085, BS 4678/4

Item code	Width x Depth	PU	PU	Art. No.
SRFTD 50/170 WH	170 x 50 mm	5 pc	-	108529



SRFTU 50/170 WH, Flat tee upward, white (RAL 9010)

Material			
PVC-U	flame retardant	-25 °C/+60 °C	2J

Standard: EN 50085, BS 4678/4

Item code	Width x Depth	PU	PU	Art. No.
SRFTU 50/170 WH	170 x 50 mm	5 pc	-	108528



SRFWD WH, Flat angle, downward, white (RAL 9010)

Material			
PVC-U	flame retardant	-25 °C/+60 °C	2J

Standard: EN 50085, BS 4678/4

Item code	Width x Depth	PU	PU	Art. No.
SRFWD 50/170 WH	170 x 50 mm	10 pc	-	108526



SRFWU WH, Flat angle upward, white (RAL 9010)

Material			
PVC-U	flame retardant	-25 °C/+60 °C	2J

Standard: EN 50085, BS 4678/4

Item code	Width x Depth	PU	PU	Art. No.
SRFWU 50/170 WH	170 x 50 mm	10 pc	-	108525



SRK WH, Cover joint,white, white (RAL 9010)

Material

PVC-U

 flame retardant

 -25 °C/+60 °C

 2J

Standard: EN 50085, BS 4678/4



Item code	For wall duct width	PU	PU	Art. No.
SRK 50/170 WH	170 mm	10 pc	200 pc	108527

SLQN WH, Square dado trunking, white (RAL 9010)

Material

PVC-U

 flame retardant

 -25 °C/+60 °C

 2J

Standard: EN 50085, BS 4678/4



Item code	Width x Depth	PU	PU	Art. No.
SLQN 50/170 WH 3M	170 x 50 mm	3 m	150 m	107281

QIEN WH, Internal angle, white (RAL 9010)

Material

PVC-U

 flame retardant

 -25 °C/+60 °C

 2J

Standard: EN 50085, BS 4678/4



Item code	Width x Depth	PU	PU	Art. No.
QIEN 50/170 WH	170 x 50 mm	1 pc	20 pc	107287

QAEN WH, External angle, white (RAL 9010)

Material			
PVC-U	flame retardant	-25 °C/+60 °C	2J

Standard: EN 50085, BS 4678/4

Item code	Width x Depth	PU	PU	Art. No.
QAEN 50/170 WH	170 x 50 mm	1 pc	20 pc	107288



QFWN WH, Flat angle, white (RAL 9010)

Material			
PVC-U	flame retardant	-25 °C/+60 °C	2J

Standard: EN 50085, BS 4678/4

Item code	PU	PU	Art. No.
QFWN 50/170 WH	1 pc	9 pc	107285



QKN WH, Cover joint, white (RAL 9010)

Material			
PVC-U	flame retardant	-25 °C/+60 °C	2J

Standard: EN 50085, BS 4678/4

Item code	For wall duct width	PU	PU	Art. No.
QKN 50/170 WH	170 mm	10 pc	200 pc	107289




QFTN 50/170 WH, Flat tee, white (RAL 9010)

Material			
PVC-U	flame retardant	-25 °C/+60 °C	2J

Standard: EN 50085, BS 4678/4

Item code	Width x Depth	PU	PU	Art. No.
QFTN 50/170 WH	170 x 50 mm	1 pc	5 pc	107284



QE WH, Stop end, white (RAL 9010)

Material			
PVC-U	flame retardant	-25 °C/+60 °C	2J

Standard: EN 50085, BS 4678/4

Item code	Width x Depth	PU	PU	Art. No.
QE 50/170 WH	170 x 50 mm	10 pc	200 pc	036073



AS 50/170 WH, Adaptor, white (RAL 9010)

Material

PVC-U



flame retardant



-25 °C/+60 °C



2J

Standard: EN 50085, BS 4678/4



Item code	Height x Width	PU	PU	Art. No.
AS 50/170 WH	50 x 170 mm	1 pc	100 pc	036074

QH 50/170 WH, Cable retainer square, white (RAL 9010)

Material

PVC-U



flame retardant



-25 °C/+60 °C



2J

Standard: EN 50085, BS 4678/4



Item code	For wall duct depth	PU	PU	Art. No.
QH 50/170 WH	50 mm	20 pc	800 pc	036065

SLXL, Starline trunking white, rounded twice, white (RAL 9010)

Material

PVC-U



flame retardant



-25 °C/+60 °C



2J

Standard: EN 50085, BS 4678/4



Item code	Width x Depth	PU	Pallet	Art. No.
SLXL 65/210 WH 3M	210 x 65 mm	87 m	-	104553

SLXL LG, Dado trunking with round corners, 3 comp., white (RAL 9010), with grey (RAL 7035) centre lid

Material			
PVC-U	flame retardant	-25 °C/+60 °C	2J

Standard: EN 50085, BS 4678/4

Item code	Width x Depth	PU	Pallet	Art. No.
SLXL 65/210 WH 3M LG centre lid	210 x 65 mm	87 m	-	106745



SLFA, Flat angle, white (RAL 9010)

Material			
PVC-U	flame retardant	-25 °C/+60 °C	2J

Standard: EN 50085, BS 4678/4

Item code	Width x Depth	PU	PU	Art. No.
SLFA 65/210 LSF	170 x 50 mm	10 pc	-	104557



SLFT, Flat tee SLXL, white (RAL 9010)

Material			
PVC-U	flame retardant	-25 °C/+60 °C	2J

Standard: EN 50085, BS 4678/4

Item code	Width x Depth	PU	PU	Art. No.
SLFT 65/210	170 x 50 mm	6 pc	-	104562



SLCR, Cable retainer, white (RAL 9010)

Material			
PVC-U	flame retardant	-25 °C/+60 °C	2J

Standard: EN 50085, BS 4678/4

Item code	For wall duct depth	PU	PU	Art. No.
SLCR	50 mm	10 pc	2000 pc	104563



SLIA, Internal angle, white (RAL 9010)

Material			
PVC-U	flame retardant	-25 °C/+60 °C	2J

Standard: EN 50085, BS 4678/4

Item code	Width x Depth	PU	PU	Art. No.
SLIA 65/210	170 x 50 mm	25 pc	-	104556



SLOA, External adjustable angle, white (RAL 9010)

Material   
PVC-U flame retardant -25 °C/+60 °C 2J

Standard: EN 50085, BS 4678/4



Item code	Width x Depth	PU	PU	Art. No.
SLOA 65/210	170 x 50 mm	25 pc	-	104559

SLE, End cap, white (RAL 9010)

Material   
PVC-U flame retardant -25 °C/+60 °C 2J

Standard: EN 50085, BS 4678/4



Item code	Width x Depth	PU	PU	Art. No.
SLE 65/210	170 x 50 mm	20 pc	240 pc	104555

SLC, Chamfered dado trunking, white (RAL 9010)

Material   
PVC-U flame retardant -25 °C/+60 °C 2J

Standard: EN 50085, BS 4678/4



Item code	Width x Depth	PU	PU	Art. No.
SLC 50/170 WH 3M	170 x 50 mm	3 m	150 m	082756

CAE WH, External angle, white (RAL 9010)

Material			
PVC-U	flame retardant	-25 °C/+60 °C	2J

Standard: EN 50085, BS 4678/4

Item code	Width x Depth	PU	PU	Art. No.
CAE 50/170 WH	170 x 50 mm	1 pc	20 pc	036067



CIE WH, Internal angle, white (RAL 9010)

Material			
PVC-U	flame retardant	-25 °C/+60 °C	2J

Standard: EN 50085, BS 4678/4

Item code	Width x Depth	PU	PU	Art. No.
CIE 50/170 WH	170 x 50 mm	1 pc	20 pc	036066



CFW WH, Flat angle, white (RAL 9010)

Material			
PVC-U	flame retardant	-25 °C/+60 °C	2J

Standard: EN 50085, BS 4678/4

Item code	Width x Depth	PU	PU	Art. No.
CFW 50/170 WH	170 x 50 mm	1 pc	10 pc	036729



CK WH, Cover joint, white (RAL 9010)

Material			
PVC-U	flame retardant	-25 °C/+60 °C	2J

Standard: EN 50085, BS 4678/4

Item code	For wall duct width	PU	PU	Art. No.
CK 50/170 WH	170 mm	10 pc	200 pc	036068




CFT 50/170 WH, Flat tee, white (RAL 9010)

Material			
PVC-U	flame retardant	-25 °C/+60 °C	2J

Standard: EN 50085, BS 4678/4

Item code	Width x Depth	PU	PU	Art. No.
CFT 50/170 WH	170 x 50 mm	1 pc	5 pc	036783



CE WH, Stop end, white (RAL 9010)

Material			
PVC-U	flame retardant	-25 °C/+60 °C	2J

Standard: EN 50085, BS 4678/4



Item code	Width x Depth	PU	PU	Art. No.
CE 50/170 WH	170 x 50 mm	10 pc	150 pc	036069

AC 50/170 WH, Adaptor, white (RAL 9010)

Material			
PVC-U	flame retardant	-25 °C/+60 °C	2J

Standard: EN 50085, BS 4678/4



Item code	Height x Width	PU	PU	Art. No.
AC 50/170 WH	50 x 170 mm	1 pc	200 pc	036062

CH 50/170 WH, Cable retainer chamfered, white (RAL 9010)

Material			
PVC-U	flame retardant	-25 °C/+60 °C	2J

Standard: EN 50085, BS 4678/4



Item code	For wall duct depth	PU	PU	Art. No.
CH 50/170 WH	50 mm	20 pc	1000 pc	036064

SLB1, Outlet box for switches and sockets, single gang, for clip-on mounting, lugs with brass inserts M 3.5 mm, with knock-out cable entries, SLB-D for European sockets, white (RAL 9010)

Material

PVC-U



flame retardant




-25 °C/+60 °C



2J

Standard: EN 50085, BS 4678/4

Item code	Number of units	PU	PU	Art. No.
SLB 1 WH	1	20 pc	160 pc	036075
SLB-D WH	1	20 pc	160 pc	040223



SLB2, Outlet box for switches and sockets, twin gang, for clip-on mounting, lugs with brass inserts M 3.5 mm, with knock-out cable entries, white (RAL 9010)

Material

PVC-U



flame retardant



-25 °C/+60 °C



2J

Standard: EN 50085, BS 4678/4

Item code	Number of units	PU	PU	Art. No.
SLB 2 WH	2	20 pc	2000 pc	036076



SLB-A WH, Adjustable back box, 30–50 mm, single or twin gang, white (RAL 9010)

Material

PVC-U



flame retardant



-25 °C/+60 °C



2J

Standard: EN 50085, BS 4678/4

Item code	Number of units	PU	PU	Art. No.
SLB 1-A WH	1	10 pc	180 pc	104560
SLB 2-A WH	2	10 pc	120 pc	104561



BT WH, PVC-bench trunking, 100x100 mm, 3 m, white (RAL 9010)

Material

PVC-U



flame retardant



-25 °C/+60 °C



2J

Standard: EN 50085, BS 4678-5

Item code	Width x Depth	PU	Pallet	Art. No.
BT WH	100 x 100 mm	171 m	-	104066



BT-1G WH, Single gang single-sided or double-sided unit, white (RAL 9010)

Material   
PVC-U flame retardant -25 °C/+60 °C 2J

Standard: EN 50085, BS 4678-5



Item code	Height x Width	PU	PU	Art. No.
BT-1G WH	100 x 100 mm	38 pc	-	104071
BT-1GD WH	100 x 100 mm	18 pc	-	104072

BT-2G WH, Double gang single-sided or double-sided unit, white (RAL 9010)

Material   
PVC-U flame retardant -25 °C/+60 °C 2J

Standard: EN 50085, BS 4678-5



Item code	Height x Width	PU	PU	Art. No.
BT-2G	100 x 100 mm	25 pc	-	104073
BT-2GD WH	100 x 100 mm	10 pc	-	104074

BT1+2G WH, Single-sided or double-sided corner channel unit with single and double switch box, white (RAL 9010)

Material   
PVC-U flame retardant -25 °C/+60 °C 2J

Standard: EN 50085, BS 4678-5



Item code	Height x Width	PU	PU	Art. No.
BT1+2G WH	100 x 100 mm	16 pc	-	104075
BT1+2GD WH	100 x 100 mm	9 pc	-	104076

BT-IB WH, Internal bend, for bench trunking, white (RAL 9010)

Material			
PVC-U	flame retardant	-25 °C/+60 °C	2J

Standard: EN 50085, BS 4678-5

Item code	Width x Depth	PU	PU	Art. No.
BT-IB WH	100 x 100 mm	12 pc	-	104077



BT-EB WH, External bend, for bench trunking, white (RAL 9010)

Material			
PVC-U	flame retardant	-25 °C/+60 °C	2J

Standard: EN 50085, BS 4678-5

Item code	Width x Depth	PU	PU	Art. No.
BT-EB WH	100 x 100 mm	12 pc	-	104078



BT/BC WH, Coupler, for bench trunking, white (RAL 9010)

Material			
PVC-U	flame retardant	-25 °C/+60 °C	2J

Standard: EN 50085, BS 4678-5

Item code	PU	PU	Art. No.
BT/BC WH	50 pc	-	104070



BT/BES/D WH, Single-sided or double-sided end cap, for bench trunking, white (RAL 9010)

Material			
PVC-U	flame retardant	-25 °C/+60 °C	2J

Standard: EN 50085, BS 4678-5

Item code	Height x Width	PU	PU	Art. No.
BT/BES WH	100 x 100 mm	100 pc	-	104068
BT/BED WH	100 x 200 mm	70 pc	-	104069



MTW WH, Trunking divider, white (RAL 9010)

Material			
PVC-U	flammschütz	-25 °C/+60 °C	2J

Standard: EN 50085, BS 4678 Part 4

Item code	For duct width	PU	PU	Art. No.
MTW 50 WH 3M	50 mm	3 m	30 m	019717



A photograph of a modern office interior. The space is characterized by glass partitions and white storage units. The lighting is bright, and the overall aesthetic is clean and professional. The image is used as a background for the company's contact information.

DIETZEL GmbH

1. Haidequerstraße 3 – 5
A-1110 Vienna
Phone: +43 1 760 76-0

International sales:
export@dietzel-univolt.com
www.dietzel-univolt.com